


Model: OA 38-1

Photo View




3D Rendered View




MATERIAL: STEEL

FINISH: ZINC BLUE PLATING

HEXAGONAL BLIND THREAD STANDOFFS

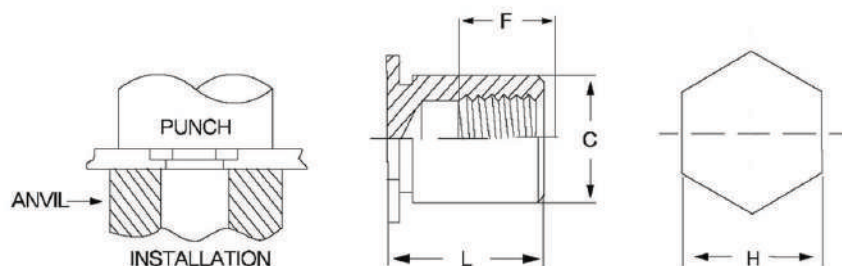

Part Number Designation

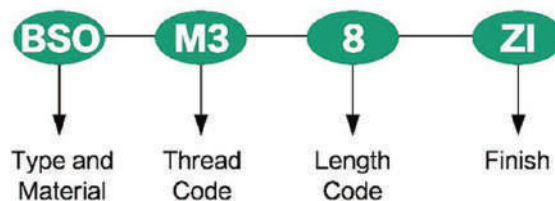

Thread Code	Rec Min.Sheet Thickness	C -.005	H Nom.	Hole size In Sheet +.003
440	.040	.165	.187	.166
6440	.040	.212	.250	.213
632	.040	.212	.250	.213
8632	.050	.280	.312	.281
832	.050	.280	.312	.281
032	.050	.280	.312	.281

Thread Code	Rec Min.Sheet Thickness	C -.013	H Nom.	Hole size In Sheet +0.08
M2.5	1.02	4.2	4.75	4.22
M3	1.02	4.2	4.75	4.22
3.5M3	1.02	5.39	6.35	5.41
M3.5	1.02	5.39	6.35	5.41
M4	1.27	5.98	7.0	6.00
3.5M4	1.27	7.12	8.0	7.14
M5	1.27	7.12	8.0	7.14
M6	1.30	8.72	10.0	8.75

All dimensions are in inches (Size Unit: inch)

	Thread Size	Type			Thread Code	Length "L" +0.05-0.13(Length Code Is in millimeters)																Min. Dist Hole C/L To Edge
		Steel	Stainless Steel	Alum-inum		6	8	10	12	14	16	18	20	22	25	/	/	/				
METRIC	M2.5X0.45	BSO	BSOS	BSOA	M2.5	6	8	10	12	14	16	18	20	22	25	/	/	/	6			
	M3X0.5	BSO	BSOS	BSOA	M3 3.5M3	6	8	10	12	14	16	18	20	22	25	/	/	/	6.8			
	M3.5X0.6	BSO	BSOS	BSOA	M3.5	6	8	10	12	14	16	18	20	22	25	/	/	/	6.8			
	M4X0.7	BSO	BSOS	BSOA	M4 3.5M4	6	8	10	12	14	16	18	20	22	25	/	/	/	7.5 8			
	M5X0.8	BSO	BSOS	BSOA	M5	6	8	10	12	14	16	18	20	22	25	/	/	/	8			
	M6X1.0	BSO	BSOS	BSOA	M6	6	8	10	12	14	16	18	20	22	25	/	/	/	9			
F Dimension Min.						3.2	4	5	6.5	9.5												